


The world's largest producer of seawater resistant aluminium air pipe heads
Innovative and high quality products

WIN2000 WITH THREADED CONNECTION BSP

Options:

1. Screen
2. Powder coating
3. Flanged connection
4. Closable
5. Sounding Pipe

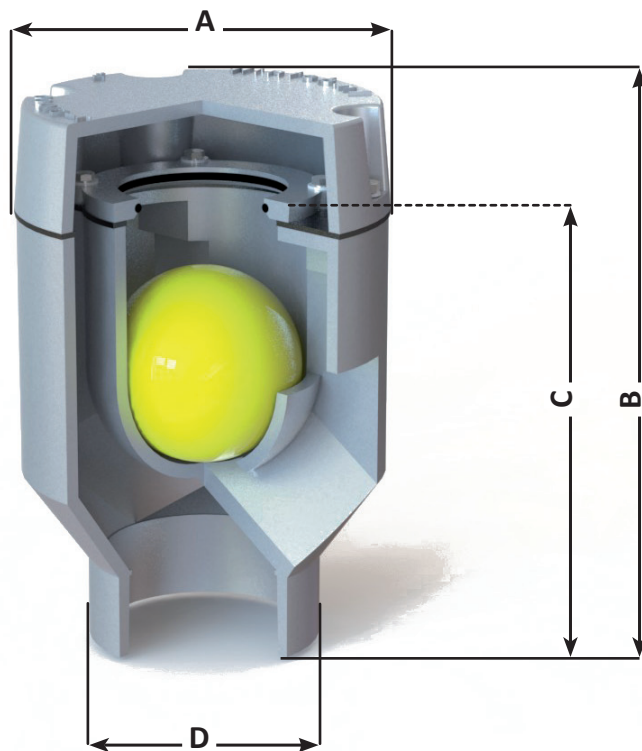

	DN50 (2")	DN65 (2 ½")	DN80 (3")	DN100 (4")	DN125 (5")
A	Ø108	Ø130	Ø160	Ø195	Ø235
B ±2.5	165	200	231	271	320
C Overflow without screen	145	175	200	232	270
D (mm)	Ø73	Ø85	Ø102	Ø128	Ø155
Weight kg.	1.15	1.6	2.55	4.75	7.1
Ball diameter	Ø60	Ø90	Ø90	Ø120	Ø145
Flow rate at 0,25 bar(m3/h)*	23	34	57	102	128
Flow rate at 0,25 bar(m3/h)**	19	33	52	78	116
Max. inlet air speed (m/s)	17	17,5	38	58	59
Inlet air flow rate at max. inlet air speed (m3/h)	135	209	612	1620	2590

* Please note that these values correspond with the WIN2000 Type 1 **without screen**, flowrate is with water being pumped through the air pipe head.

** Please note that these values correspond with the WIN2000 Type 1 **with screen mesh 18**, flowrate is with water being pumped through the air pipe head.

Made of seawater resistant Aluminium DIN1725 | Non corroding | Maintenance free | Smallest design available
No suction blocking | Cost saving | light weight = less fuel = less CO2 emission | Approved by all major classification societies